

# Écrous à sertir en aveugle OPTO<sup>®</sup>-SSM



acier zingué

tête fraisée | cylindrique lisse | ouvert



DONNÉS  
**CAO**  
EN LIGNE

Série  
**895**

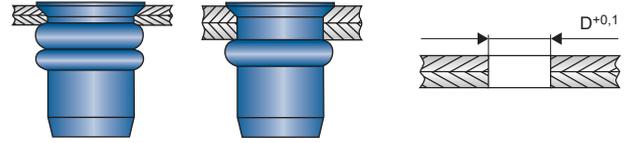

C4C [1.0303]

M		I	N°	
<b>M4</b>	1,5 - 6,0	14,0	10895400600	500
D 6,0	k 1,5	dk 10,0		↓ 5200 N
<b>M5</b>	1,5 - 6,0	15,0	10895500600	500
D 7,0	k 1,5	dk 11,0		↓ 9500 N

M		I	N°	
<b>M6</b>	1,5 - 6,0	17,5	10895600600	500
D 9,0	k 1,5	dk 13,0		↓ 15500 N
<b>M8</b>	1,5 - 7,5	21,5	10895800750	500
D 11,0	k 1,5	dk 16,0		↓ 21500 N