



Colonnettes à sertir à la presse V-BSOS

 **Inox série 300**

borgne

DONNÉES
CAO
EN LIGNE

Série
491

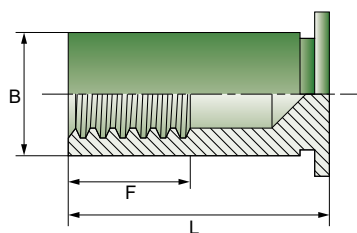

Colonnettes à sertir à la presse en acier inoxydable (série AISI 300), adaptées pour la pose dans les tôles d'une dureté **jusqu'à HRB 70**.

M			B		H			N°
M3	1,02	6,00	4,19	3,20	4,80	4,22	6,00	10491030006
		8,00		4,00				10491030008
		10,00						10491030010
		12,00		5,00				10491030012
		14,00						10491030014
		16,00		6,50				10491030016
		18,00						10491030018
		20,00		9,50				10491030020
		22,00						10491030022
		25,00						10491030025
3,5M3	1,02	6,00	5,38	3,20	6,40	5,41	6,80	10491035006
		8,00		4,00				10491035008
		10,00						10491035010
		12,00		5,00				10491035012
		14,00						10491035014
		16,00		6,50				10491035016
		18,00						10491035018
		20,00		9,50				10491035020
		22,00						10491035022
		25,00						10491035025

M		L + 0,05 - 0,13	B	Min. longueur de filetage F	H		Distance minimale centre du trou / bord de la tôle	N°
M4	1,27	8,00	7,10	4,00	7,90	7,14	8,00	10491040008
		10,00		10491040010				
		12,00		5,00				10491040012
		14,00		6,50				10491040014
		16,00		10491040016				
		18,00		10491040018				
		20,00		10491040020				
		22,00		10491040022				
		25,00		10491040025				
M5	1,27	8,00	7,10	4,00	7,90	7,14	8,00	10491050008
		10,00		10491050010				
		12,00		5,00				10491050012
		14,00		6,50				10491050014
		16,00		10491050016				
		18,00		10491050018				
		20,00		10491050020				
		22,00		10491050022				
		25,00		10491050025				



Les colonnettes avec filetage, 3,5M3, offrent une épaisseur de paroi plus importante pour la taille de filetage M3.