



Colonnets à sertir à la presse V-SOS

 **Inox série 300**

ouverte

DONNÉES
CAO
EN LIGNE

Série
486

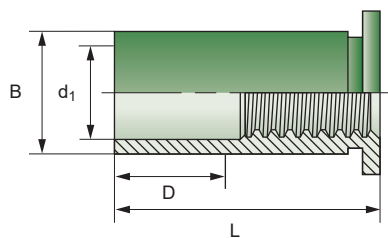

Colonnets à sertir à la presse en acier inoxydable (série AISI 300), adaptées pour la pose dans les tôles d'une dureté **jusqu'à HRB 70**.

M	min.	L	D	d1	B	H	Distance minimale centre du trou / bord de la tôle	N°
M2,5	1,02	4,00	± 0,25	± 0,13	- 0,13	4,20	4,20	10486025004
		6,00						10486025006
		8,00						10486025008
		10,00						10486025010
		12,00						10486025012
M3	1,02	3,00	± 0,25	± 0,13	- 0,13	4,20	4,22	10486030003
		4,00						10486030004
		5,00						10486030005
		6,00						10486030006
		7,00						10486030007
		8,00						10486030008
		10,00						10486030010
		12,00						10486030012
		14,00						10486030014
		16,00						10486030016
3,5M3	1,02	3,00	± 0,25	± 0,13	- 0,13	5,39	5,41	10486035003
		4,00						10486035004
		5,00						10486035005
		6,00						10486035006
		7,00						10486035007
		8,00						10486035008
		10,00						10486035010
		12,00						10486035012
		14,00						10486035014
		16,00						10486035016
		18,00						10486035018

M	min.	L	D	d1	B	H	Distance minimale centre du trou / bord de la tôle	N°
M4	1,27	3,00	± 0,25	± 0,13	- 0,13	7,12	7,14	10486040003
		4,00						10486040004
		6,00						10486040006
		8,00						10486040008
		10,00						10486040010
		12,00						10486040012
		14,00						10486040014
		16,00						10486040016
		18,00						10486040018
		20,00						10486040020
M5	1,27	22,00	± 0,25	± 0,13	- 0,13	7,90	7,14	10486040022
		25,00						10486040025
		4,00						10486050004
		6,00						10486050006
		8,00						10486050008
		10,00						10486050010
		12,00						10486050012
		14,00						10486050014
		16,00						10486050016
		18,00						10486050018
3,5M5	1,27	20,00	± 0,25	± 0,13	- 0,13	7,90	7,14	10486050020
		22,00						10486050022
		25,00						10486050025
		28,00						10486050028



Les colonnettes avec filetage 3,5M3 offrent une épaisseur de paroi plus importante pour la taille de filetage M3.