

# Rivet Aveugle Haute Résistance FERRO®-BULB



inox A2

inox A2

tête plate | ouvert

DONNÉES  
**CAO**  
EN LIGNE

Série  
**791**

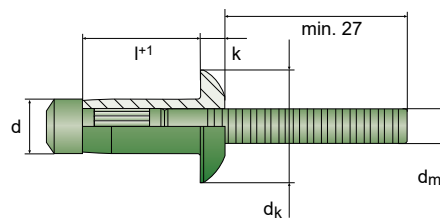

| d                        | l+1                      |              | N°                           |     |
|--------------------------|--------------------------|--------------|------------------------------|-----|
| <b>4,0</b>               | 7,5                      | 1,0 - 3,0    | 10791040075                  | 500 |
|                          | 10,0                     | 3,0 - 5,0    | 10791040100                  | 500 |
|                          | 12,5                     | 5,0 - 7,0    | 10791040125                  | 500 |
| <b>d<sub>k</sub> 8,0</b> | <b>d<sub>m</sub> 2,6</b> | <b>k 1,5</b> | 4,1 - 4,3 mm  5200 N  4000 N |     |
| <b>4,8</b>               | 10,0                     | 1,5 - 3,5    | 10791048100                  | 500 |
|                          | 12,5                     | 3,5 - 6,0    | 10791048125                  | 500 |
|                          | 15,5                     | 6,0 - 8,5    | 10791048155                  | 250 |
| <b>d<sub>k</sub> 9,6</b> | <b>d<sub>m</sub> 3,2</b> | <b>k 1,5</b> | 4,9 - 5,1 mm  5500 N  5000 N |     |

| d                         | l+1                      |              | N°                            |     |
|---------------------------|--------------------------|--------------|-------------------------------|-----|
| <b>6,4</b>                | 10,5                     | 2,8 - 4,8    | 10791064105                   | 250 |
| <b>d<sub>k</sub> 13,4</b> | <b>d<sub>m</sub> 3,9</b> | <b>k 2,7</b> | 6,7 - 6,9 mm  11500 N  8800 N |     |
| <b>6,4</b>                | 12,5                     | 4,8 - 6,8    | 10791064125                   | 250 |
| <b>d<sub>k</sub> 13,4</b> | <b>d<sub>m</sub> 3,9</b> | <b>k 2,7</b> | 6,7 - 6,9 mm  12500 N  8800 N |     |
| <b>6,4</b>                | 14,5                     | 6,8 - 8,8    | 10791064145                   | 250 |
| <b>d<sub>k</sub> 13,4</b> | <b>d<sub>m</sub> 3,9</b> | <b>k 2,7</b> | 6,7 - 6,9 mm  13000 N  8800 N |     |
| <b>6,4</b>                | 16,5                     | 8,8 - 10,8   | 10791064165                   | 250 |
| <b>d<sub>k</sub> 13,4</b> | <b>d<sub>m</sub> 3,9</b> | <b>k 2,7</b> | 6,7 - 6,9 mm  14000 N  8800 N |     |
| <b>6,4</b>                | 18,5                     | 10,8 - 12,8  | 10791064185                   | 250 |
| <b>d<sub>k</sub> 13,4</b> | <b>d<sub>m</sub> 3,9</b> | <b>k 2,7</b> | 6,7 - 6,9 mm  15000 N  8800 N |     |