
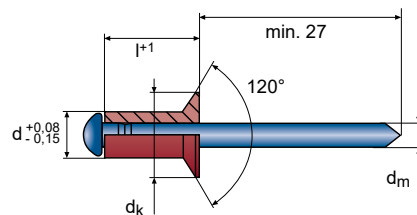


Rivet Aveugle ouvert ALFO®

 aluminium
  acier zingué

tête fraisée | ouvert



3,0 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 5,0 mm EN AW-5754 [AlMg3]

d	l +1		N°.	
3,0	10,0	5,0 - 7,5	10700300100	500
	8,0	3,5 - 6,0	10700300080	500
	6,0	2,0 - 4,0	10700300060	500
	5,0	1,5 - 3,0	10700300050	500

dk 6,0 -0,4 **dm** 1,7  3,1 mm  740 N  1000 N

3,2	10,0	5,0 - 7,5	10700320100	500
	8,0	3,0 - 5,5	10700320080	500
	6,0	1,5 - 3,5	10700320060	500
	10,0	7,0 - 9,0	10700320120	500

dk 6,2 -0,4 **dm** 1,9  3,3 mm  750 N  1220 N

4,0	20,0	12,5 - 16,5	10700400200	500
	18,0	12,0 - 14,5	10700400180	500
	16,0	8,5 - 12,5	10700400160	500
	12,0	6,5 - 9,0	10700400120	500
	10,0	5,0 - 7,0	10700400100	500
	8,0	2,0 - 5,5	10700400080	500
	6,0	1,5 - 3,5	10700400060	500

dk 7,5 -0,5 **dm** 2,0  4,1 mm  1250 N  1580 N

d	l +1		N°.	
4,8	25,0	15,0 - 20,5	10700480250	500
	20,0	12,0 - 15,5	10700480200	500
	16,0	8,0 - 12,0	10700480160	500
	12,0	6,0 - 8,0	10700480120	500
	10,0	4,0 - 6,5	10700480100	500

dk 9,0 -0,5 **dm** 2,7  4,9 mm  1640 N  2200 N

5,0	35,0	25,0 - 30,0	10700500350	250
	30,0	20,0 - 25,5	10700500300	500
	25,0	15,0 - 20,5	10700500250	500
	20,0	12,0 - 15,5	10700500200	500
	16,0	8,0 - 12,0	10700500160	500
	12,0	6,0 - 8,0	10700500120	500
	10,0	4,0 - 6,5	10700500100	500
	8,0	2,0 - 5,0	10700500080	500

dk 9,3 -0,5 **dm** 2,7  5,1 mm  1820 N  2400 N



d	l ⁺¹		N°.	
4,8	40,0	29,0 - 34,5	10700048400	250
	35,0	24,5 - 29,5	10700048350	250
	30,0	20,0 - 25,0	10700048300	500
	25,0	15,0 - 20,5	10700048250	500
	20,0	12,0 - 15,5	10700048200	500
	18,0	11,5 - 13,5	10700048180	500
	16,0	8,0 - 12,0	10700048160	500
	14,0	7,5 - 10,0	10700048140	500
	12,0	6,0 - 8,0	10700048120	500
	10,0	4,0 - 6,5	10700048100	500
	9,0	2,5 - 6,0	10700048090	500
	8,0	2,5 - 5,0	10700048080	500
	6,0	1,0 - 3,0	10700048060	500

d_k 9,5 -1,0 **d_m 2,7** **k 1,1 ±0,3** 4,9 mm 1640 N 2200 N

5,0	50,0	39,5 - 45,0	10700050500	250
	45,0	34,5 - 40,0	10700050450	250
	40,0	29,0 - 35,0	10700050400	250
	35,0	24,5 - 30,0	10700050350	250
	30,0	20,0 - 25,0	10700050300	500
	25,0	15,0 - 20,5	10700050250	500
	20,0	12,0 - 15,5	10700050200	500
	18,0	11,5 - 13,5	10700050180	500
	16,0	8,0 - 12,0	10700050160	500
	14,0	7,5 - 10,0	10700050140	500
	12,0	6,0 - 8,0	10700050120	500
	10,0	4,0 - 6,5	10700050100	500
	8,0	2,5 - 5,0	10700050080	500
	6,0	1,0 - 3,0	10700050060	500

d_k 9,5 -0,8 **d_m 2,7** **k 1,1 ±0,3** 5,1 mm 1820 N 2400 N

d	l ⁺¹		N°.	
6,0	50,0	38,0 - 43,0	10700060500	250
	30,0	20,0 - 25,0	10700060300	250
	28,0	19,5 - 22,5	10700060280	250
	25,0	15,0 - 20,0	10700060250	250
	22,0	14,5 - 17,0	10700060220	500
	20,0	11,0 - 15,0	10700060200	500
	18,0	10,5 - 13,0	10700060180	500
	16,0	7,0 - 11,0	10700060160	500
	12,0	5,0 - 7,5	10700060120	500
	10,0	3,0 - 5,5	10700060100	500
	8,0	1,0 - 3,5	10700060080	500

d_k 12,0 -1,2 **d_m 3,2** **k 1,5 ±0,4** 6,1 mm 2660 N 3500 N

6,4	30,0	18,0 - 24,0	10700064300	250
	25,0	14,0 - 19,0	10700064250	250
	20,0	10,0 - 14,5	10700064200	250
	18,0	10,0 - 13,0	10700064180	250
	16,0	6,0 - 11,0	10700064160	250
	12,0	2,5 - 7,0	10700064120	250

d_k 13,0 -1,4 **d_m 3,6** **k 1,8 ±0,4** 6,5 mm 2880 N 4600 N

7,8	26,0	16,5 - 20,5	10700078260	250
	22,0	12,5 - 16,5	10700078220	250
	18,0	9,5 - 12,5	10700078180	250
	15,0	4,0 - 9,5	10700078150	250

d_k 14,0 **d_m 3,7** **k 2,0** 8,0 mm 6600 N 9550 N