

Rivet Aveugle ouvert ALFO®

acier zingué


acier zingué

tête fraisée | ouvert

DIN EN ISO
15980

DONNÉES
CAO
EN LIGNE

Série
707

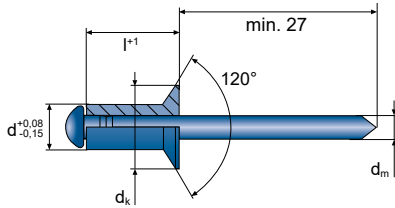

C4C [1.0303]

d	l +1		N°	
3,0	6,0	1,5 - 3,5	10707300060	500
	8,0	3,0 - 5,5	10707300080	500
	10,0	5,0 - 7,0	10707300100	500
d _k 6,0 -0,4	d _m 1,9	 3,1 mm	 1000 N	 1340 N
3,2	6,0	1,5 - 3,5	10707320060	500
	8,0	3,0 - 5,5	10707320080	500
d _k 6,2 -0,4	d _m 2,0	 3,3 mm	 1180 N	 1560 N
4,0	6,0	1,5 - 3,5	10707400060	500
	7,0	2,0 - 4,5	10707400070	500
	8,0	3,0 - 5,5	10707400080	500
	10,0	5,0 - 7,0	10707400100	500
	12,0	6,5 - 9,0	10707400120	500
	16,0	8,0 - 12,5	10707400160	500
d _k 7,5 -0,5	d _m 2,3	 4,1 mm	 2100 N	 2800 N

d	l +1		N°	
4,8	8,0	2,0 - 4,5	10707480080	500
	10,0	3,0 - 6,5	10707480100	500
	12,0	5,0 - 8,5	10707480120	500
	14,0	6,5 - 10,0	10707480140	500
	16,0	8,0 - 12,0	10707480160	500
	18,0	9,5 - 13,5	10707480180	500
d _k 9,0 -0,5	d _m 2,7	 4,9 mm	 3180 N	 4220 N
5,0	8,0	2,0 - 4,5	10707500080	500
	10,0	4,0 - 6,5	10707500100	500
	12,0	6,0 - 8,5	10707500120	500
	16,0	8,0 - 12,0	10707500160	500
	20,0	11,0 - 15,5	10707500200	500
	25,0	15,0 - 20,0	10707500250	250
	30,0	19,5 - 25,0	10707500300	250
d _k 9,3 -0,5	d _m 2,9	 5,1 mm	 3320 N	 4740 N
6,4	10,0	3,0 - 5,0	10707640100	250
d _k 13,4 -1,8	d _m 3,8	 6,5 mm	 4920 N	 5700 N