
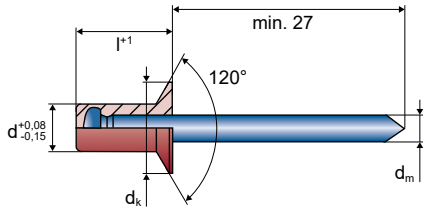


Rivet Aveugle Étanches CERTO®

 aluminium  acier zingué
tête fraisée | étanche



EN AW-5019 [AlMg5]

d	l +1		N°	
3,2	8,0	2,0 - 3,5	10900320080	500
	9,5	3,0 - 4,5	10900320095	500
	11,0	4,5 - 6,0	10900320110	500
dk 5,9 -0,3 dm 1,7  3,3 mm  1100 N  1450 N				
4,0	9,5	3,5 - 5,0	10900400095	500
	11,0	5,0 - 6,5	10900400110	500
	12,5	6,5 - 8,0	10900400125	500
	14,5	7,5 - 9,5	10900400145	500
dk 8,0 -0,4 dm 2,2  4,1 mm  1600 N  2200 N				

d	l +1		N°	
4,8	9,5	3,5 - 5,0	10900480095	500
	11,0	5,0 - 6,5	10900480110	500
	13,0	6,5 - 8,0	10900480130	500
	14,5	7,5 - 9,0	10900480145	500
	16,0	9,5 - 11,0	10900480160	500
	18,0	11,0 - 13,0	10900480180	500
	19,5	10,5 - 14,5	10900480195	500
	21,0	12,0 - 15,0	10900480210	500
dk 9,3 -0,4 dm 2,7  4,9 mm  2200 N  3100 N				