

ALFO® Standard Blind Rivet

Stainless Steel A2





Stainless Steel A2

Dome head | open

DIN EN ISO
15983

CAD
DATA
ONLINE

Series
708

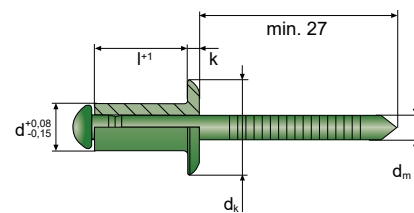

[1.4301]

d	l ⁺¹		No.	
2,4	6,0	0,5 - 3,5	10708024060	500

d_k 5,0 -0,2 **d_m** 1,5 **k** 0,8 ±0,1 2,5 mm 1000 N 1500 N

3,0	6,0	0,5 - 3,0	10708030060	500
	8,0	3,0 - 5,0	10708030080	500
	10,0	5,0 - 7,0	10708030100	500
	12,0	6,5 - 8,5	10708030120	500
	16,0	8,5 - 12,0	10708030160	500

d_k 6,3 -0,7 **d_m** 1,9 **k** 0,8 ±0,2 3,1 mm 2050 N 2600 N

3,2	6,0	0,5 - 3,0	10708032060	500
	8,0	3,0 - 5,0	10708032080	500
	10,0	5,0 - 7,0	10708032100	500
	12,0	6,5 - 8,5	10708032120	500
	16,0	8,5 - 12,0	10708032160	500
	18,0	12,0 - 14,0	10708032180	500

d_k 6,5 -0,7 **d_m** 1,9 **k** 0,8 ±0,2 3,3 mm 2050 N 2600 N

4,0	6,0	1,0 - 2,5	10708040060	500
	8,0	2,5 - 4,5	10708040080	500
	10,0	4,5 - 6,5	10708040100	500
	12,0	6,5 - 8,5	10708040120	500
	14,0	8,5 - 10,5	10708040140	500
	16,0	10,0 - 12,0	10708040160	500
	18,0	12,0 - 14,0	10708040180	500
	20,0	14,0 - 16,0	10708040200	500
	25,0	16,0 - 21,0	10708040250	500

d_k 8,0 -1,0 **d_m** 2,5 **k** 1,0 ±0,3 4,1 mm 2750 N 3550 N

4,8	8,0	1,5 - 4,0	10708048080	500
	10,0	4,0 - 6,0	10708048100	500
	12,0	6,0 - 8,0	10708048120	500
	14,0	7,0 - 9,5	10708048140	500
	16,0	8,0 - 11,0	10708048160	500
	18,0	11,0 - 13,0	10708048180	500
	20,0	13,0 - 16,0	10708048200	500

d_k 9,5 -1,0 **d_m** 2,9 **k** 1,1 ±0,3 4,9 mm 4250 N 5400 N

5,0	8,0	2,0 - 4,0	10708050080	500
	10,0	4,0 - 6,0	10708050100	500
	12,0	6,0 - 8,0	10708050120	500
	14,0	7,0 - 9,5	10708050140	500
	16,0	8,0 - 11,0	10708050160	500
	18,0	11,0 - 13,0	10708050180	500
	20,0	13,0 - 15,0	10708050200	500
	25,0	15,0 - 20,0	10708050250	250
	30,0	20,0 - 25,0	10708050300	250
	35,0	25,0 - 30,0	10708050350	250
	40,0	30,0 - 35,0	10708050400	250

d_k 9,5 -0,8 **d_m** 2,9 **k** 1,1 ±0,3 5,1 mm 5000 N 6400 N

6,0	10,0	2,0 - 5,5	10708060100	250
	12,0	5,5 - 7,5	10708060120	250
	16,0	7,5 - 11,0	10708060160	250

d_k 12,0 -1,2 **d_m** 3,8 **k** 1,5 ±0,4 6,1 mm 6300 N 8250 N

6,4	10,0	2,5 - 6,0	10708064100	250
	12,0	4,0 - 7,5	10708064120	250
	14,0	6,0 - 9,5	10708064140	250
	16,0	7,5 - 11,5	10708064160	250
	18,0	9,0 - 13,0	10708064180	250
	20,0	10,5 - 14,5	10708064200	250
	25,0	15,5 - 19,5	10708064250	250
	30,0	19,0 - 23,0	10708064300	250

d_k 13,0 -1,5 **d_m** 3,8 **k** 1,8 ±0,4 6,5 mm 7250 N 9335 N