



ALFO® Standard Blind Rivet -grooved-

Aluminium Steel galvanized

Dome head | open

CAD
DATA
ONLINE

Series
712

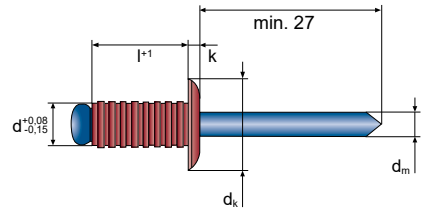

EN AW-5754 [AlMg3]

d	l +1	Mindestbohr- lochtiefe	No.	
3,2	10,0	13,0	10712032100	500
dk 6,5 -0,7	dm 1,7	k 0,8 ±0,15	3,3 mm	600 N 1000 N
4,0	8,0	11,0	10712040080	500
	12,0	15,0	10712040120	500
dk 8,0 -0,7	dm 2,0	k 1,0 ±0,15	4,1 mm	1000 N 1350 N

d	l +1	Mindestbohr- lochtiefe	No.	
4,8	10,0	14,0	10712048100	500
	16,0	20,0	10712048160	500
dk 9,5 -0,7	dm 2,7	k 1,1 ±0,15	4,9 mm	1350 N 1820 N