

ALFO® Standard Blind Rivet

Aluminium Steel galvanized

Countersunk head | open





MOVIE

DIN EN ISO
15978

CAD
DATA
ONLINE

Series
700

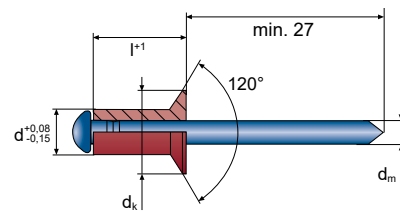

3,0 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 5,0 mm EN AW-5754 [AlMg3]

d	l +1		No.	
3,0	5,0	1,5 - 3,0	10700300050	500
	6,0	2,0 - 4,0	10700300060	500
	8,0	3,5 - 6,0	10700300080	500
	10,0	5,0 - 7,5	10700300100	500

d_k 6,0 -0,4 d_m 1,7 3,1 mm 740 N 1000 N

3,2	6,0	1,5 - 3,5	10700320060	500
	8,0	3,0 - 5,5	10700320080	500
	10,0	5,0 - 7,5	10700320100	500
	12,0	7,0 - 9,0	10700320120	500

d_k 6,2 -0,4 d_m 1,9 3,3 mm 750 N 1220 N

4,0	6,0	1,5 - 3,5	10700400060	500
	8,0	2,0 - 5,5	10700400080	500
	10,0	5,0 - 7,0	10700400100	500
	12,0	6,5 - 9,0	10700400120	500
	16,0	8,5 - 12,5	10700400160	500
	18,0	12,0 - 14,5	10700400180	500
	20,0	12,5 - 16,5	10700400200	500

d_k 7,5 -0,5 d_m 2,0 4,1 mm 1250 N 1580 N

d	l +1		No.	
4,8	10,0	4,0 - 6,5	10700480100	500
	12,0	6,0 - 8,0	10700480120	500
	16,0	8,0 - 12,0	10700480160	500
	20,0	12,0 - 15,5	10700480200	500
	25,0	15,0 - 20,5	10700480250	500

d_k 9,0 -0,5 d_m 2,7 4,9 mm 1640 N 2200 N

5,0	8,0	2,0 - 5,0	10700500080	500
	10,0	4,0 - 6,5	10700500100	500
	12,0	6,0 - 8,0	10700500120	500
	16,0	8,0 - 12,0	10700500160	500
	20,0	12,0 - 15,5	10700500200	500
	25,0	15,0 - 20,5	10700500250	500
	30,0	20,0 - 25,5	10700500300	500
	35,0	25,0 - 30,0	10700500350	250

d_k 9,3 -0,5 d_m 2,7 5,1 mm 1820 N 2400 N