

ALFO® Standard Blind Rivet

Aluminium Steel galvanized

Dome head | open





MOVIE

DIN EN ISO
15977

CAD
DATA
ONLINE

Series
700

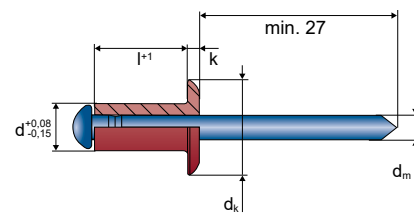

2,4 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 7,8 mm EN AW-5754 [AlMg3]

d	l +1		No.	
2,4	3,0	0,5 - 1,0	10700024030	500
	4,0	0,5 - 2,0	10700024040	500
	6,0	1,5 - 4,0	10700024060	500
	8,0	3,5 - 6,0	10700024080	500
	10,0	6,0 - 8,0	10700024100	500
	12,0	8,0 - 10,0	10700024120	500

d_k 5,0 -0,7 d_m 1,5 k 0,6 ±0,15 2,5 mm 380 N 600 N

3,0	4,0	0,5 - 2,0	10700030040	500
	5,0	1,0 - 3,0	10700030050	500
	6,0	1,5 - 4,0	10700030060	500
	7,0	3,0 - 5,0	10700030070	500
	8,0	3,0 - 6,0	10700030080	500
	10,0	5,0 - 7,5	10700030100	500
	12,0	7,0 - 9,0	10700030120	500
	16,0	9,0 - 12,5	10700030160	500
	18,0	12,0 - 14,5	10700030180	500
	20,0	13,0 - 16,5	10700030200	500
	25,0	16,0 - 21,5	10700030250	500

d_k 6,3 -0,7 d_m 1,7 k 0,8 ±0,2 3,1 mm 740 N 1000 N

d	l +1		No.	
3,2	4,0	0,5 - 1,5	10700032040	500
	5,0	1,0 - 2,5	10700032050	500
	6,0	1,5 - 3,5	10700032060	500
	8,0	3,0 - 5,5	10700032080	500
	10,0	5,0 - 7,5	10700032100	500
	12,0	7,0 - 9,0	10700032120	500
	14,0	8,5 - 10,5	10700032140	500
	16,0	9,0 - 13,0	10700032160	500
	18,0	10,0 - 14,5	10700032180	500

d_k 6,5 -0,7 d_m 1,9 k 0,8 ±0,2 3,3 mm 750 N 1220 N

4,0	4,0	0,5 - 1,5	10700040040	500
	5,0	1,0 - 2,5	10700040050	500
	6,0	1,0 - 3,5	10700040060	500
	7,0	3,0 - 4,5	10700040070	500
	8,0	3,0 - 5,5	10700040080	500
	10,0	5,0 - 7,0	10700040100	500
	12,0	6,5 - 9,0	10700040120	500
	14,0	8,5 - 11,0	10700040140	500
	16,0	8,5 - 12,5	10700040160	500
	18,0	12,0 - 14,5	10700040180	500
	20,0	12,5 - 16,5	10700040200	500
	25,0	15,5 - 21,0	10700040250	500
	30,0	20,5 - 26,0	10700040300	500
	35,0	25,5 - 31,0	10700040350	500

d_k 8,0 -1,0 d_m 2,0 k 1,0 ±0,3 4,1 mm 1250 N 1800 N

d	l ⁺¹		No.	
5,0	6,0	1,0 - 3,0	10700050060	500
	8,0	2,5 - 5,0	10700050080	500
	10,0	4,0 - 6,5	10700050100	500
	12,0	6,0 - 8,0	10700050120	500
	14,0	7,5 - 10,0	10700050140	500
	16,0	8,0 - 12,0	10700050160	500
	18,0	11,5 - 13,5	10700050180	500
	20,0	12,0 - 15,5	10700050200	500
	25,0	15,0 - 20,5	10700050250	500
	30,0	20,0 - 25,0	10700050300	500
	35,0	24,5 - 30,0	10700050350	250
	40,0	29,0 - 35,0	10700050400	250
	45,0	34,5 - 40,0	10700050450	250
	50,0	39,5 - 45,0	10700050500	250

d_k 9,5 -0,8 **d_m** 2,7 **k** 1,1 ±0,3  5,1 mm  1820 N  2400 N

d	l ⁺¹		No.	
6,0	8,0	1,0 - 3,5	10700060080	500
	10,0	3,0 - 5,5	10700060100	500
	12,0	5,0 - 7,5	10700060120	500
	16,0	7,0 - 11,0	10700060160	500
	18,0	10,5 - 13,0	10700060180	500
	20,0	11,0 - 15,0	10700060200	500
	22,0	14,5 - 17,0	10700060220	500
	25,0	15,0 - 20,0	10700060250	250
	28,0	19,5 - 22,5	10700060280	250
	30,0	20,0 - 25,0	10700060300	250
	50,0	38,0 - 43,0	10700060500	250

d_k 12,0 -1,2 **d_m** 3,2 **k** 1,5 ±0,4  6,1 mm  2660 N  3500 N

6,4	12,0	2,5 - 7,0	10700064120	250
	16,0	6,0 - 11,0	10700064160	250
	18,0	10,0 - 13,0	10700064180	250
	20,0	10,0 - 14,5	10700064200	250
	25,0	14,0 - 19,0	10700064250	250
	30,0	18,0 - 24,0	10700064300	250

d_k 13,0 -1,4 **d_m** 3,6 **k** 1,8 ±0,4  6,5 mm  2880 N  4600 N

7,8	15,0	4,0 - 9,5	10700078150	250
	18,0	9,5 - 12,5	10700078180	250
	22,0	12,5 - 16,5	10700078220	250
	26,0	16,5 - 20,5	10700078260	250

d_k 14,0 **d_m** 3,7 **k** 2,0  8,0 mm  6600 N  9550 N