



Concealed Head Stud V-CFHC for blind hole mounting

 **Stainless steel 300 series**

short shaft

CAD
DATA
ONLINE

Series
481

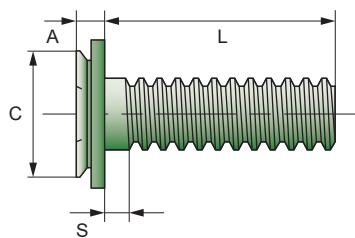

Self-clinching studs of stainless steel (AISI 300 series), suitable for use in sheet metal with hardnesses **up to HRB 70**.

M		L ± 0,40	E ± 0,25	C max.	A	S max.	 + 0,08	Mindestabstand Lochmitte/ Blechrand	Bohrtiefe	No.
M3	2,40	6,00	5,21	4,35	1,80	2,40	4,37	4,00	1,91	10481030006
		8,00								10481030008
		10,00								10481030010
		12,00								10481030012
		16,00								10481030016
		20,00								10481030020
M4	2,40	6,00	8,33	7,35	1,80	2,40	7,37	5,60	1,91	10481040006
		8,00								10481040008
		10,00								10481040010
		12,00								10481040012
		16,00								10481040016
		20,00								10481040020
		25,00								10481040025
M5	2,40	10,00	8,89	7,90	1,80	2,40	7,93	6,40	1,91	10481050010
		12,00								10481050012
		16,00								10481050016
		20,00								10481050020
		25,00								10481050025



Max. size of part to be mounted in a hole is equal to the size of the hole in the sheet metal + 0.6 mm.