



Flush Head Pin V-TPS

 **Stainless steel 300 series**

lisse

CAD
DATA
ONLINE

Series
470

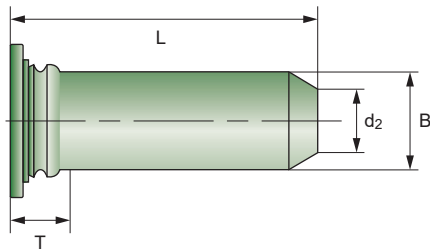

Self-clinching pins of stainless steel (AISI 300 series), suitable for use in sheet metal with hardnesses **up to HRB 70**.

M	min. 	L ± 0,40	E ± 0,40	 + 0,08	S max.	B ± 0,05	d2 ± 0,15	Distance minimale centre du trou / bord de la tôle	No.
M3	1,00	8,00	5,20	3,50	2,29	3,00	2,05	6,40	10470030008
		10,00							10470030010
		12,00							10470030012
		16,00							10470030016
M4	1,00	8,00	6,12	4,50	2,29	4,00	2,82	7,10	10470040008
		10,00							10470040010
		12,00							10470040012
		16,00							10470040016

M	min. 	L ± 0,40	E ± 0,40	 + 0,08	S max.	B ± 0,05	d2 ± 0,15	Distance minimale centre du trou / bord de la tôle	No.
M5	1,00	10,00	7,19	5,50	2,29	5,00	3,53	7,60	10470050010
		12,00							10470050012
		16,00							10470050016
		20,00							10470050020
M6	1,00	12,00	8,13	6,50	2,29	6,00	4,24	7,90	10470060012
		16,00							10470060016
		20,00							10470060020



Max. size of part to be mounted in a hole is equal to the size of the hole in the sheet metal + 0.6 mm.