



OPTO® Mehrbereichsblindniet -lackiert-

Aluminium Stahl verzinkt

Flachkopf | offen

CAD
DATEN
ONLINE

Serie
600

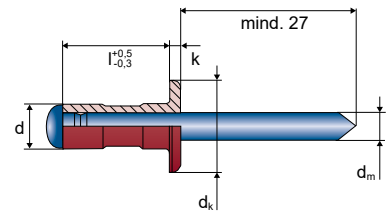

EN AW-5052 [AlMg2,5]

d	l ⁺¹		Nr.		€/ 1.000
3,2	6,8	0,8 - 3,4	10600032068/9005	500	82,84
	8,0	0,8 - 4,8	10600032080/9005	500	84,71
	9,5	1,2 - 6,4	10600032095/9005	500	92,21
	11,0	4,0 - 7,9	10600032110/9005	500	98,55

d_k 6,4 d_m 1,8 k 1,0 3,3 mm 720 N 1000 N

4,0	6,0	0,5 - 3,0	10600040060/9005	500	93,39
	9,5	1,2 - 6,4	10600040095/9005	500	102,18
	12,7	4,0 - 9,5	10600040127/9005	500	111,90
	16,9	6,4 - 12,7	10600040169/9005	500	123,04

d_k 7,9 d_m 2,3 k 1,2 4,1 mm 1120 N 1650 N

d	l ⁺¹		Nr.		€/ 1.000
4,8	10,3	1,6 - 6,4	10600048103/9005	500	125,49
	15,1	4,8 - 11,1	10600048151/9005	500	136,74
	16,9	6,4 - 12,7	10600048169/9005	500	146,35
	24,8	12,7 - 19,8	10600048248/9005	500	173,07

d_k 9,8 d_m 2,8 k 1,5 4,9 mm 1530 N 2300 N