

CERTO® Dichtblindniet



Aluminium  Stahl verzinkt
Senkkopf | geschlossen



DIN EN ISO
15974

CAD
DATEN
ONLINE

Serie
900

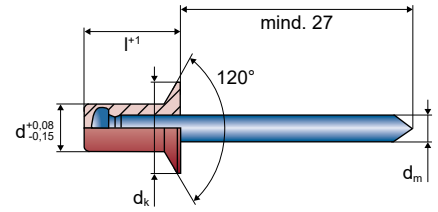

EN AW-5019 [AlMg5]

d	l ⁺¹		Nr.		€/ 1.000
3,2	8,0	2,0 - 3,5	10900320080	500	76,40
	9,5	3,0 - 4,5	10900320095	500	79,68
	11,0	4,5 - 6,0	10900320110	500	84,25

d_k 5,9^{-0,3} **d_m** 1,7 3,3 mm 1100 N 1450 N

4,0	9,5	3,5 - 5,0	10900400095	500	102,65
	11,0	5,0 - 6,5	10900400110	500	106,74
	12,5	6,5 - 8,0	10900400125	500	110,49
	14,5	7,5 - 9,5	10900400145	500	113,29

d_k 8,0^{-0,4} **d_m** 2,2 4,1 mm 1600 N 2200 N

d	l ⁺¹		Nr.		€/ 1.000
4,8	9,5	3,5 - 5,0	10900480095	500	117,64
	11,0	5,0 - 6,5	10900480110	500	120,46
	13,0	6,5 - 8,0	10900480130	500	125,26
	14,5	7,5 - 9,0	10900480145	500	140,38
	16,0	9,5 - 11,0	10900480160	500	158,07
	18,0	11,0 - 13,0	10900480180	500	163,70
	19,5	10,5 - 14,5	10900480195	500	183,61
21,0	12,0 - 15,0	10900480210	500	240,56	

d_k 9,3^{-0,4} **d_m** 2,7 4,9 mm 2200 N 3100 N