



Einpressgewindebuchse V-CSOS für Sacklochmontage

 **Edelstahl 300er Serie**

CAD
DATEN
ONLINE

Serie
496

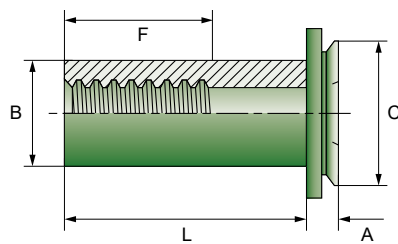

Einpressgewindebuchsen aus nicht rostendem Stahl (AISI 300er Serie), geeignet für die Verarbeitung in Blechen mit Härten bis **HRB 70**.

M	min. 	L + 0,05 - 0,13	 + 0,08	Bohrtiefe	A	B	C	F	H	Mindestabstand Lochmitte/ Blechrand	Nr.
M3	2,40	4,00	5,41	1,91	1,83	4,20	5,39	5,00	6,35	4,80	10496030004
		6,00									10496030006
		8,00									10496030008
		10,00									10496030010
		12,00									10496030012
M4	2,40	4,00	7,92	1,91	1,83	6,23	7,90	6,50	8,74	6,40	10496040004
		6,00									10496040006
		8,00									10496040008
		10,00									10496040010
		12,00									10496040012
		16,00									10496040016
		20,00									10496040020