



Colonnettes à sertir à la presse V-SO

acier zingué
ouverte | zingué

DONNÉES
CAO
EN LIGNE

Série
485

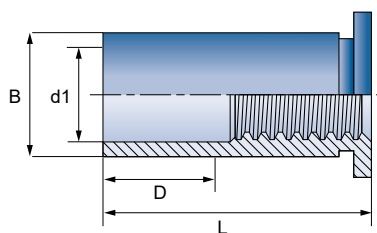

Colonnettes à sertir à la presse en acier trempé, adaptées pour la pose dans les tôles d'une dureté jusqu'à HRB 80.

M	min.	L + 0,05 - 0,13	D ± 0,25	d1 ± 0,13	B - 0,13	H	+ 0,08	Distance minimale centre du trou / bord de la tôle	N°
M2	1,02	4,00							10485020004
		6,00	0,00						10485020006
		8,00		2,50	4,20	4,80	4,20	6,00	10485020008
		10,00	4,00						10485020010
		12,00							10485020012
M2,5	1,02	4,00							10485025004
		6,00	0,00						10485025006
		8,00		3,20	4,20	4,80	4,20	6,00	10485025008
		10,00	4,00						10485025010
		12,00							10485025012
M3	1,02	3,00							10485030003
		4,00							10485030004
		5,00	0,00						10485030005
		6,00							10485030006
		7,00							10485030007
		8,00		3,20	4,20	4,80	4,22	6,00	10485030008
		10,00							10485030010
		12,00	4,00						10485030012
		14,00							10485030014
3,5M3	1,02	16,00	8,00						10485030016
		18,00							10485030018
		3,00							10485035003
		4,00							10485035004
		5,00	0,00						10485035005
		6,00							10485035006
		7,00							10485035007
		8,00		3,20	5,39	6,40	5,41	6,80	10485035008
		10,00							10485035010
3,5M3	1,02	12,00	4,00						10485035012
		14,00							10485035014
		16,00	8,00						10485035016
		18,00							10485035018

M	min.	L + 0,05 - 0,13	D ± 0,25	d1 ± 0,13	B - 0,13	H	+ 0,08	Distance minimale centre du trou / bord de la tôle	N°
M4	1,27	3,00							10485040003
		4,00	0,00						10485040004
		6,00							10485040006
		8,00							10485040008
		10,00							10485040010
		12,00	4,00	4,80	7,12	7,90	7,14	8,00	10485040012
		14,00							10485040014
		16,00							10485040016
M5	1,27	18,00	8,00						10485040018
		20,00							10485040020
		22,00	11,00						10485040022
		25,00							10485040025
		4,00							10485050004
		6,00	0,00						10485050006
		8,00							10485050008
		10,00							10485050010
		12,00	4,00						10485050012
M5	1,27	14,00		5,35	7,12	7,90	7,14	8,00	10485050014
		16,00							10485050016
		18,00	8,00						10485050018
		20,00							10485050020
		22,00	11,00						10485050022
		25,00							10485050025



Les colonnettes avec filetage, 3,5M3, offrent une épaisseur de paroi plus importante pour la taille de filetage M3.