



Rivet Aveugle ALFO® CORPS RAINURÉ

aluminium    acier zingué

tête plate | ouvert

DONNÉES  
CAO  
EN LIGNE

Série  
712

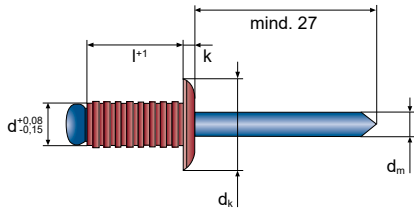

EN AW-5754 [AlMg3]

| d                       | l +1               | Profondeur min. du trou de longement | N°          |                        |
|-------------------------|--------------------|--------------------------------------|-------------|------------------------|
| 3,2                     | 10,0               | 13,0                                 | 10712032100 | 500                    |
| d <sub>k</sub> 6,5 -0,7 | d <sub>m</sub> 1,7 | k 0,8 ±0,15                          | 3,3 mm      | ←→ 600 N    ←→ 1000 N  |
| 4,0                     | 8,0                | 11,0                                 | 10712040080 | 500                    |
|                         | 12,0               | 15,0                                 | 10712040120 | 500                    |
| d <sub>k</sub> 8,0 -0,7 | d <sub>m</sub> 2,0 | k 1,0 ±0,15                          | 4,1 mm      | ←→ 1000 N    ←→ 1350 N |

| d                       | l +1               | Profondeur min. du trou de longement | N°          |                        |
|-------------------------|--------------------|--------------------------------------|-------------|------------------------|
| 4,8                     | 10,0               | 14,0                                 | 10712048100 | 500                    |
|                         | 16,0               | 20,0                                 | 10712048160 | 500                    |
| d <sub>k</sub> 9,5 -0,7 | d <sub>m</sub> 2,7 | k 1,1 ±0,15                          | 4,9 mm      | ←→ 1350 N    ←→ 1820 N |