

Rivet Aveugle Multi-Serrage OPTO®



aluminium acier zingué
tête plate | ouvert



FILM

DONNÉES
CAO
EN LIGNE

Série
600

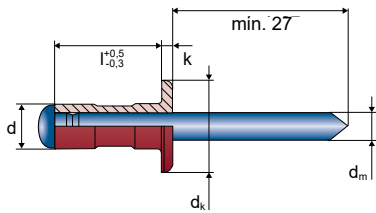

EN AW-5052 [AlMg2,5]

d	l +1		N°		
3,2	6,8	0,8 - 3,4	10600032068	500	
	8,0	0,8 - 4,8	10600032080	500	
	9,5	1,2 - 6,4	10600032095	500	
	11,0	4,0 - 7,9	10600032110	500	
d _k 6,4	d _m 1,8	k 1,0	 3,3 mm	 720 N	 1000 N
4,0	6,0	0,5 - 3,0	10600040060	500	
	9,5	1,2 - 6,4	10600040095	500	
	12,7	4,0 - 9,5	10600040127	500	
	16,9	6,4 - 12,7	10600040169	500	
d _k 7,9	d _m 2,3	k 1,2	 4,1 mm	 1120 N	 1650 N

d	l ⁺¹		N°		
4,8	10,3	1,6 - 6,4	10600048103	500	
	15,1	4,8 - 11,1	10600048151	500	
	16,9	6,4 - 12,7	10600048169	500	
	20,0	10,0 - 16,0	10600048200	500	
	24,8	12,7 - 19,8	10600048248	500	
	30,0	19,0 - 24,0	10600048300	500	
d _k 9,8	d _m 2,8	k 1,5	 4,9 mm	 1530 N	 2300 N